

HLQ Pro quartz infrared indoor heaters

HLQ Pro heaters provide short wave high-energy instant infrared heat in a wide variety of indoor situations as well as locations such as under waterproof canopies and roofs. With models from 1.5kW to 18kW they offer the instant answer to many zone or localised heating solutions.

The units can be wall mounted or ceiling suspended, and are available in single and three phase versions. They are manufactured from aluminium, finished in a neutral ivory powder coat finish. Guards are included as standard with all models.

They are fitted with high efficiency gold short wave infrared lamps. A low glare gold lamp option is available on request.



HLQ 15-60

HLQ 135-180



HLQ 90-120

Full range of infrared heaters for mobile and fixed systems

- The perfect solution to industrial and commercial zone heating
- Recommended by most electricity suppliers
- Low energy consumption with substantially reduced emissions compared to gas heaters
- Competitive prices
- Full technical support
- Design and planning advice available
- 110V version available upon request
- Portable units available on request

Applications

- Churches
- Despatch areas
- Factories
- Frost protection
- Garages/ workshops
- Sports halls
- Offices
- School halls
- Shops
- Warehouses





Technical Data

Hard glass infrared lamps

HLQ range


Code	No. lamps	Watts	Supply		Weight (kg)
			(V)	Phase	
1 HLQ15G	1	1500	220-240	Single phase	3.5
1 HLQ20G	1	2000	220-240	Single phase	3.5
2 HLQT30G	2	3000	220-240	Single phase	5
2 HLQT40G	2	4000	220-240	Single phase	5
3 HLQT45G	3	4500	220-240/ 380-415	Single phase or 3-phase	6.5
3 HLQT60G	3	6000	220-240/ 380-415	Single phase or 3-phase	6.5
4 HLQ90G*	6	9000	380-415	3-phase only	13.6
4 HLQ120G*	6	12000	380-415	3-phase only	13.6
5 HLQ135G*	9	13500	380-415	3-phase only	20.4
5 HLQ180G*	9	18000	380-415	3-phase only	20.4

* Made to order. Please enquire for availability details.

Area coverage

	H (m)	X (m)	Y (m)	Z (m)	Area (m ²)
Wall mounted					
1	2.5	3.2	2.6	6.0	12.0
2	3.0	3.7	3.6	7.0	19.0
3	3.5	4.0	4.2	8.1	25.0
4	3.5	8.0	4.8	15.5	56.0
5	3.5	12.0	4.8	22.0	81.0
Overhead mounted					
1	3.0	3.0	2.0	-	6.0
2	3.5	3.3	2.6	-	8.6
3	4.0	5.0	3.4	-	17.0
4	4.0	10.0	4.0	-	40.0
5	4.0	15.0	4.0	-	60.0

Note: Heating coverage areas shown are focussed measured data. Temperatures around the area fringes may be felt less. Therefore, depending on the intended use, this must be considered and allowances made accordingly to account for individual senses. The data given is therefore for guidance purposes only.

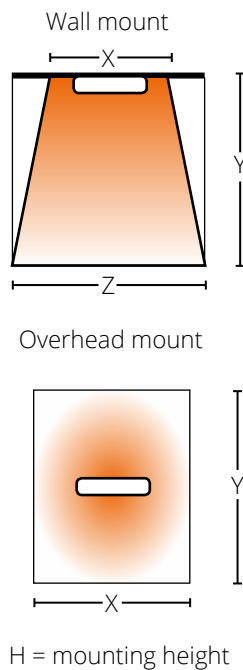

Supplied with


- All single phase* units are pre-wired with mains cable
- Wall bracket

Optional

- Low glare option
- Overhead mounting kit

*3-phase units are to be wired by installer

Dimensions

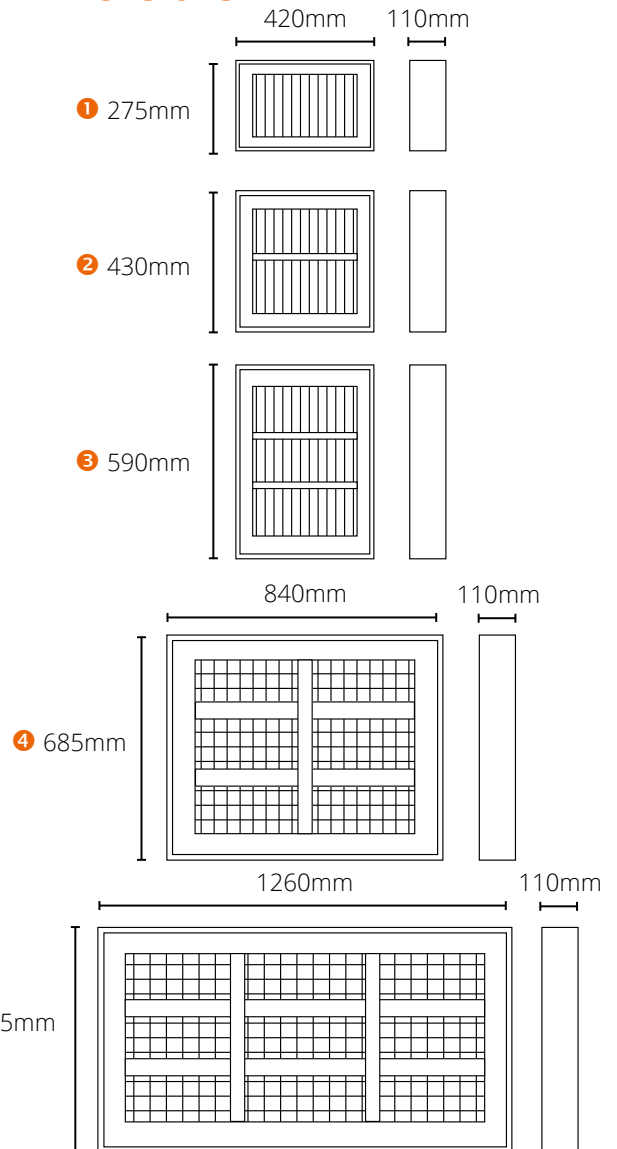

VICTORY

Victory Lighting (UK) Ltd
 Unit 3, Eastman Way, Hemel Hempstead, Hertfordshire HP2 7DU
www.victorylighting.co.uk | [e sales@victorylighting.co.uk](mailto:sales@victorylighting.co.uk) | [t +44 \(0\)1442 215200](tel:+441442215200)

© Victory Lighting (UK) Ltd 2015
 The information contained in this literature is for general information purposes only. Victory Lighting (UK) Ltd endeavours to keep the information up to date and correct, but makes no representations or warranties of any kind, express or implied, about the completeness, accuracy, reliability, suitability or availability with respect to the information, products, services, or related graphics contained in this literature.

Victory Lighting (UK) Ltd accepts no liability for any loss or damage including without limitation, indirect or consequential loss or damage, or any loss or damage whatsoever arising from loss of data or profits arising out of, or in connection with, the use of this literature.

Distributed by